


IP-PBX failover system TS3000 (Elastix based)

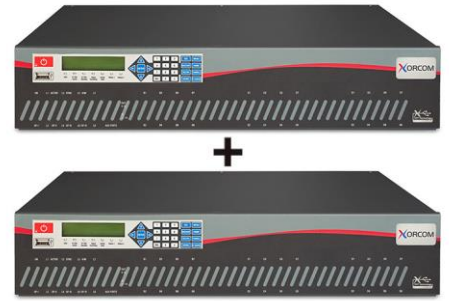

- Technical specifications

Capabilities:

- Up to 1000 users
- Various combinations of FXS, FXO, BRI ISDN and PRI/CAS/R2 ports
- Supports SIP and IAX2 phones and trunks
- Up to 8 BRI ISDN ports
- Up to 4 PRI (E1/T1), T1 CAS, or R2 (E1) ports
- Up to 20 external [Astribank USB channel banks](#)
- Concurrent calls: Up to 325 (SIP only); 300 (PRI + FXS)
- [Supports auxiliary appliances](#) (door locks, alarm systems etc.)
- Intuitive Web-based user interface

Hardware:

- Processor Intel i3 2120 (3.3GHz, 2 Cores, 3MB cache)
- RAM 4 GB
- Hard disk From 320GB 2.5" (500GB optional)
- RAID1 Dual hard drive for increased system reliability
- Fan 3 redundant fans
- Echo Cancellation Module Voice enhancement & echo cancellation (optional)
- Analog Lines Fail-over Kit In case of power outage or an Asterisk malfunction, up to six analog PSTN lines are routed directly to predetermined analog extensions (optional and model-specific)
- USB 2 external USB 2.0
- I/O Ports Input/Output ports for Asterisk peripheral device support (optional and model-specific)

Software:

- Software: Asterisk version 11.x (Elastix 2.4x)
- Linux version: CentOS 5.x
- GUI: Based on FreePBX

[Download product data sheet](#)

[Download product guide](#)